

Model 6 features:
(versus Model 5)

Center of gravity with the power transformer at the side panel favors freestanding and rackmounting


Inboard gain controls

AUX input converts the preamp to a buffer amp. Optional AUX output is a second output or combines with the AUX input as an insert loop or auxiliary buffer amp.

2.5dB/step x 24 positions

Rear-panel XLRs

Remote control with optional gain controls GC62 and GC64

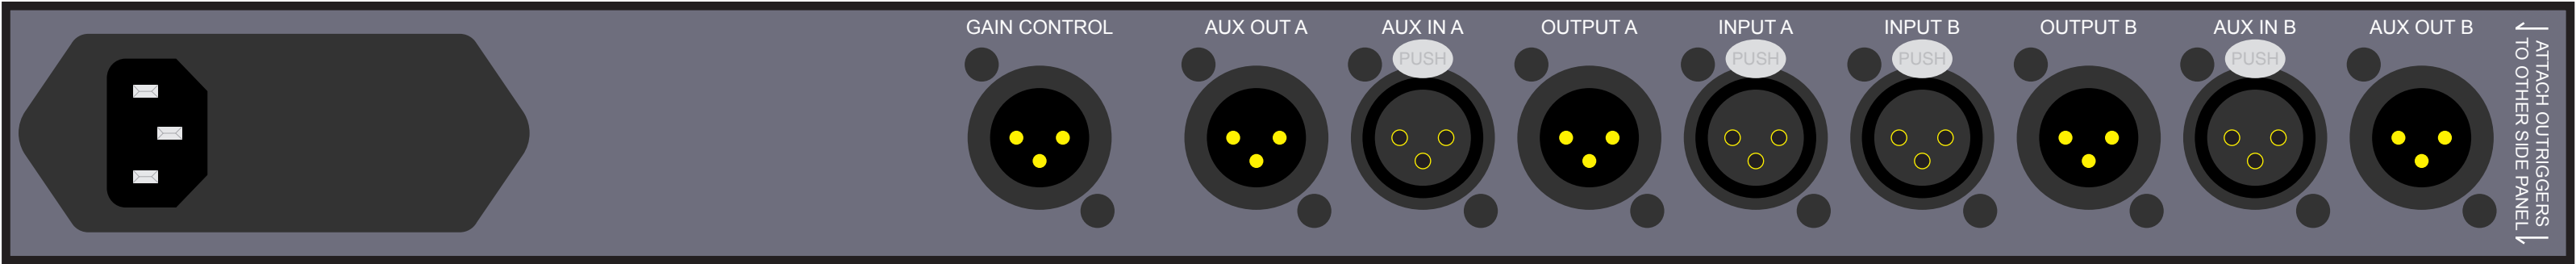

Some rendition details are omitted. Features are subject to change and vary with options.